


ALL STAR (Vinyl with PreFixx® Protective Finish)

by
Boltaflex

Grade B

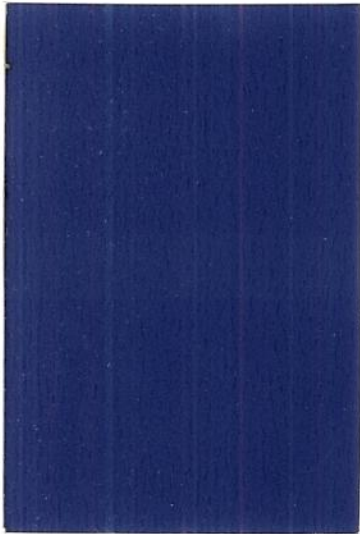


Royal 2V5



Dove 2V1



Cinnibar 2V2



Forest 2V3



Imperial Blue 2V4



Burgundy 2V6



Black 2V7

L'ARIA (Woven Polyurethane)

by
Boltaflex

Grade C



Brandy 3V5



Mushroom 3V1



Mustang 3V2



Evergreen 3V3



Indigo 3V4



Cabernet 3V6



Black 3V7

**Work In Style,
Sit in Comfort,
Get the Value™**

TECHNICAL SPECIFICATIONS

ALL STAR (Vinyl with PreFixx® Protective Finish)
Grade B

Boltaflex®

Specifications

Width: 54"
Roll Length: 60 yards
Standard Weight: 32 oz./Linear Yd.

Performance

Manufactured to meet flammability requirements contained in these specifications: Boston IX-New York Port Authority Code Requirements dated 1/92; NFPA Code 701 (small scale) Life Safety Code Standards dated 1977. FMVSS-302; Designed to meet FAA-FAR 25.853(a) and Appendix F Part 1(a) (1) (ii) per 1993 Publication; California Technical Bulletin 117-75, Sec. E

Performance

	Test Method	Results
Surface Abrasion:	CFFA-1a	60,000 cycles stainless steel screen wire, 400,000 #8 cotton duck. No wear to base
Tensile Strength:	CFFA-17	85 x 75
Breaking Strength (tack tear):	CFFA-14	35 x 30
Adhesion:	CFFA-3	3 x 3
Cold Crack:	CFFA-6	-20 degrees F
Light Fastness:		650 Hours no change

PreFixx® Protective Finish

- Antimicrobial/Antibacterial Protection
- Urine Stain Resistant
- Oil Resistant
- Antistain Finish/Easily Cleaned
- Mildew Resistant Backing and Face
- Sulfide Stain Resistant/All Colors
- Anti-Static Slip Finish
- Superior Disinfectant Resistance
- UV Stabilized Pigments

CLEANING INSTRUCTIONS

Day to day soil - Remove ordinary dirt and smudges with a mild soap and water solution. Dry with a soft, lint-free cloth or towel. For more difficult stains, use a stronger detergent; however, follow the detergent manufacturer's instructions closely.

Special cleaning problems - Many stains will be removed when these cleaning agents are used in the following order.

Step 1: Use nonabrasive household cleaners such as Formula 409® All-Purpose Spray Cleaner or Fantastik® Spray Cleaner with water and a soft cloth.

Step 2*: Use a solvent-type cleaner such as rubbing alcohol (isopropyl alcohol) liberally applied with a soft cloth. Dry area with another cloth, rinse with clean water and dry.

Step 3*: Use strong, active solvent cleaners such as nail polish remover (acetone/water) applied with a soft cloth. Stain should be removed with less than six rubs; if stain persists after six rubs, stain has probably set** and may not be capable of being removed. Dry area with another clean cloth, rinse with clean water and dry.

* **Caution:** These solvents are highly flammable. Exercise proper care in cleaning and notify personnel in area of danger. Wear rubber gloves during all cleaning activity. Use caution in cleaning around buttons, stitching and wooden or decorative trim, since these solvents could easily damage such areas.

** Although vinyls protected by PreFixx are resistant to most common stains, some fabric dyes have the ability to create a permanent stain. To minimize any problems from these and other stains, it is recommended that as soon as they are noticed all stains should be cleaned, making sure the recommended cleaning steps are followed in order.

L'ARIA (Woven Polyurethane)

Grade C

Specifications

Width: 54"
Roll Length: 60 yards
Standard Weight: 8 oz./Square Yd.

Performance

Manufactured to meet flammability requirements contained in these specifications: California Technical Bulletin 117, Class 1, UPAC Class 1

Performance

	Test Method	Results
Surface Abrasion:	CFFA-1a	20,000 cycles wire screen
Tensile Strength:	CFFA-17	100 x 100
Breaking Strength (tack tear):	CFFA-14	65 x 65
Adhesion:	CFFA-3	5.0# Min.
Cold Crack:	CFFA-6	-20 degrees F
Light Fastness:		Indoor 40 Hours

Please Note: Terms and corresponding data refer to performance in the specific test indicated and should not be construed to imply the behavior of this or any material under actual conditions. This information is accurate to the best of our knowledge at the time of printing, but is not intended to relieve the user from its responsibility to comply with all procedures applicable to the safe use of this product.

9to5

s e a t i n g

PHONE: 800.872-9787 • FAX: 866.200.0782